

proflio[®] for homes of all sizes SEILAR

TOUGH BUT STYLISH HOT WATER SYSTEMS THAT WILL GO THE D

If you're looking to replace an existing electric storage water heater, Proflio is an ideal solution - available in a variety of tank sizes for homes of all sizes and delivering full mains pressure.


Model	280L	310L	330L	360L	500L
Heating form	Cycle heating	Cycle heating	Cycle heating	Cycle heating	Cycle heating
Voltage/Frequency	230VAC/50Hz	230VAC/50Hz	230VAC/50Hz	230VAC/50Hz	230VAC/50Hz
Input power	1.87kW	1.87kW	1.87kW	1.87kW	2.15kW
Heating apacity	8.5kW	8.5kW	8.5kW	8.5kW	10kW
Rated current	8.6A	8.6A	8.6A	8.6A	12.6A
Maximum power	1.35kW	1.55kW	2.43kW	2.43kW	2.93kW
Maximum current	11.2A	11.2A	11.2A	11.2A	15.2A
Water flow	1169L/h	1560L/h	1169L/h	1169L/h	2169L/h
Tank volumn	280L	310L	330L	360L	500L
Refrigerant/Quantity	R410A/800g	R410A/800g	R410A/800g	R410A/800g	R410A/1200g
High pressure	4.4MPa	4.4MPa	4.4MPa	4.4MPa	4.4MPa
Low pressure	0.15MPa	0.15MPa	0.15MPa	0.15MPa	0.15MPa
Max working pressure	4.4MPa	4.4MPa	4.4MPa	4.4MPa	4.4MPa
Tank/ casing material	Cold painted	Cold painted	Cold painted	Cold painted	SS 304L
Noise	≤50dB(A)	≤50dB(A)	≤50dB(A)	≤50dB(A)	≤50dB(A)
Pipe size	DN20	DN20	DN20	DN20	DN 32
Net weight/Gross weight	50/60kg	55/64kg	59/64kg	65/74kg	75/86kg



SERIES: TH50A3S595A500



SEILAR WATER HEATERS
HOT WATER SOLUTIONS PRODUCT GUIDE

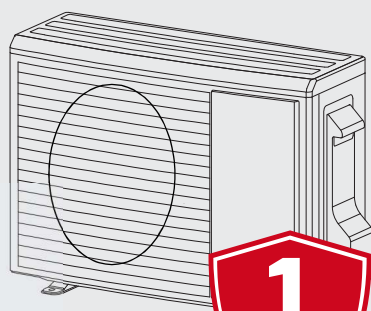

Australian Standard